


SECURISOL

ANTI-SLIP LIQUID FOR SMOOTH SURFACES

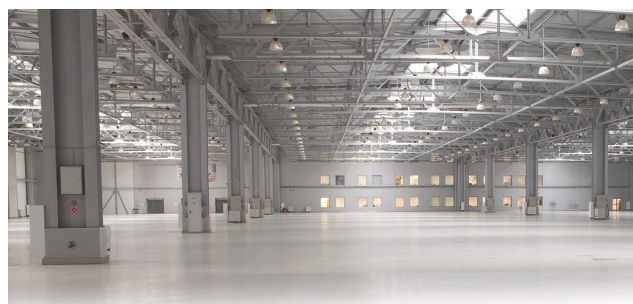

7 good reasons for using SECURISOL

1. Reduces the risk of accidents on all **slippery floors**.
2. Can be applied **inside or outside**.
3. Creates an **invisible** microscopic reaction.
4. And so improves the **friction** on floors.
5. Practically **odourless** during application.
6. Does **not change** the natural appearance of materials.
7. Remains effective **after numerous washes**.

Particularly suitable for use in



Public buildings



Food trade



Health

After drying, increases the friction, in particular on wet surfaces, so limiting risk of accidents.
Can be used on stone floor, stoneware, enamelled stoneware, terracotta.

Characteristics	Instructions for use
<p>Appearance: liquid Colour: colourless to slightly yellow. Density: 1.08 pH: 1</p> <p>CONSUMPTION: 10 to 15 m² per litre</p> <p>For more information, see MSDS.</p>	<p>Ready to use product. Spray on a dry and clean surface. In some cases, the product can be spread with a « Faubert » or equivalent or a sponge. The reaction time determines the slip result. The application time varies according to the nature and type of substratum: the product must cover the whole surface to be treated. If the product evaporates before the end of the required action time (high room temperature), add product again.</p> <ul style="list-style-type: none">- Toilets in enamel: 30 - 45 min- Tiled floors - stone floors: 30 - 45 min- Cement- minerals: 30 - 60 min <p>When the required result is obtained (anti-slip), <u>rinse carefully and abundantly with clear water</u>. No residue must be left. If necessary, renew the treatment. We recommend you always do a preliminary test. The floor maintenance after treatment is carried out with classic cleaners.</p> <p><u>Using precautions:</u> Never let the product dry. On some stones or mineral surface, the surface can whiten after drying (formation of complex salts, exposure of crystals on surface...). Do not apply to hot surfaces or surfaces exposed to the sun, and below 5°C. Do not apply to shiny or treated floors. Do not apply to dark tiles, risk of whitening. Do not apply to glass and aluminium.</p>

GB08032016/2

7 +

LAVOXOL: Non-Foaming Degreaser for Automatic floor cleaners

This datasheet supersedes previous documents. The information contained in these data sheets is based on our present knowledge and experience and is given as indication only. Under no circumstances does it engage our responsibility in the event of misuse of our products. Non-contractual photos and images.



Tél 02 97 54 50 00
www.7darmor.fr

7d'Armor