


# LUSTERE T

**NON-STICK NON-FRICTION POLISHING AGENT**

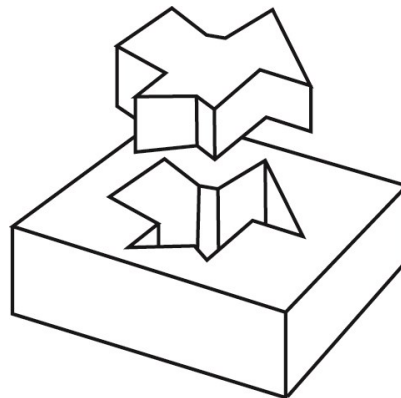

## 7 good reasons for using LUSTERE T


1. **High-quality** lubricant for micro-mechanisms.
2. Eliminates the adhesion.
3. Dry lubricant suitable for **sliding parts**.
4. Can be used from **-20°C to +200°C**.
5. Durable **long-lasting** protection.
6. Does **not stain** after drying.
7. Leaves a colourless film after application.

## Particularly suitable for use in



Industry

To lubricate micro-mechanisms, small slideways, mechanical transmissions.  
 Eliminates adherence on shoe-moulds in the shoe industry.  
 Facilitates the slide in printing operations, while eliminating static electricity.  
 For mould release in rubber and plastic industries.  
 Polishes skaïs, office equipment, dashboards.

Characteristics	WYPNET	Instructions for use
Silicone in solvent solution. Net volume: 500 ml  For more information, see MSDS.		Shake the aerosol before use. Spray uniformly at a distance of 20 cm from the support to be treated. The treatment must be repeated each time the lubrication is needed. If polishing, spread on with a dry clean cloth.

GB02112016/2

**7 +**

**USILUB VG:** Vegetal cutting oil for machining.

This datasheet supersedes previous documents. The information contained in these data sheets is based on our present knowledge and experience and is given as indication only. Under no circumstances does it engage our responsibility in the event of misuse of our products. Non-contractual photos and images.



Tél 02 97 54 50 00  
[www.7darmor.fr](http://www.7darmor.fr)

**7d'Armor**