




PROCABE

LUBRICANT FOR CABLES AND CHAINS

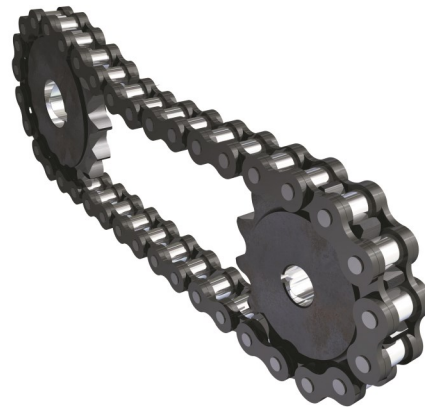

7 good reasons for using PROCABE

1. Highly **adhesive and stable** lubricant.
2. Excellent **anti-wear** and **extreme pressure** properties. Reduces wear generated by friction.
3. Remarkable resistance to water, steam and salt spray. Weather resistant.
4. Good protection against corrosion
5. Contains an antioxidant agent which provides efficient protection against ageing, thereby increasing the duration of use of the grease.
6. Its adherent agent ensures better adhesion to treated metals and an increased resistance to water washout.
7. Net volume: 97% active ingredient.

Particularly suitable for use in



Industry

Protects and lubricates all moving mechanical surfaces or surfaces subject to different types of humidity, water, hot or acid steams, dust...

Protection and lubrication of moving or immobile cables and chains, on cranes, lifting apparatus, lift trucks, bridge cranes, conveyor chains, towing winches, hoists.

Lubrication of fixed ratio transmissions, toothed gears, cylindrical worm gears, bearings, pumps, valves, agitators, mixers, submerged pumps, automatic water sprinklers.

Characteristics	Instructions for use
Colour: green Appearance: smooth and stringy Soap: lithium Operating range: -20°C to +140°C. Dropping point: 180 °C (NFT 60102) Penetrability at 25°C: 265-295 (NFT60132) NLGI grade: 2 Shell 4-ball welding test: 315 ASTM D2595 Propellant gas: CO ₂ Net volume: 400 ml	Shake aerosol vigorously until the agitator ball dislodges. Always apply on a clean dry surface. Clean the parts to be treated carefully before spraying. Its extension tube allows the user to treat hard to reach places. After use, turn the aerosol upside down and spray until only air comes out. Do not spray on a naked flame or hot surfaces. For more information, see MSDS.

GB13082018/3

7+

ROXBILL : Anti-Corrosion Shiny Lacquer

This datasheet supersedes previous documents. The information contained in these data sheets is based on our present knowledge and experience and is given as indication only. Under no circumstances does it engage our responsibility in the event of misuse of our products. Non-contractual photos and images.



Tél 02 97 54 50 00
Www.7darmor.fr

7d'Armor